	REVISION DESCRIPTION	CHECK	APP	DATE	REV. NOTICE. NO
△1					
△2					
△3					

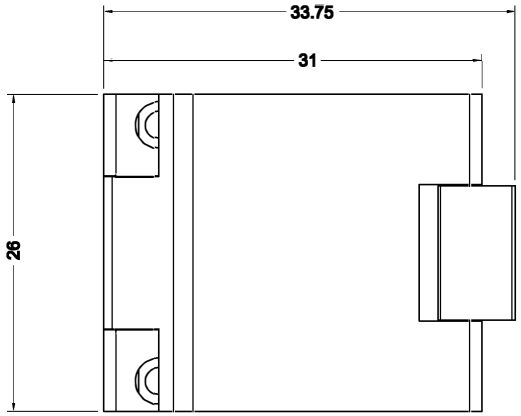

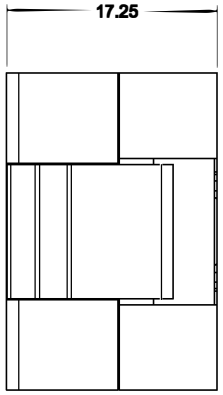

PCB PATTERN (TOP VIEW)

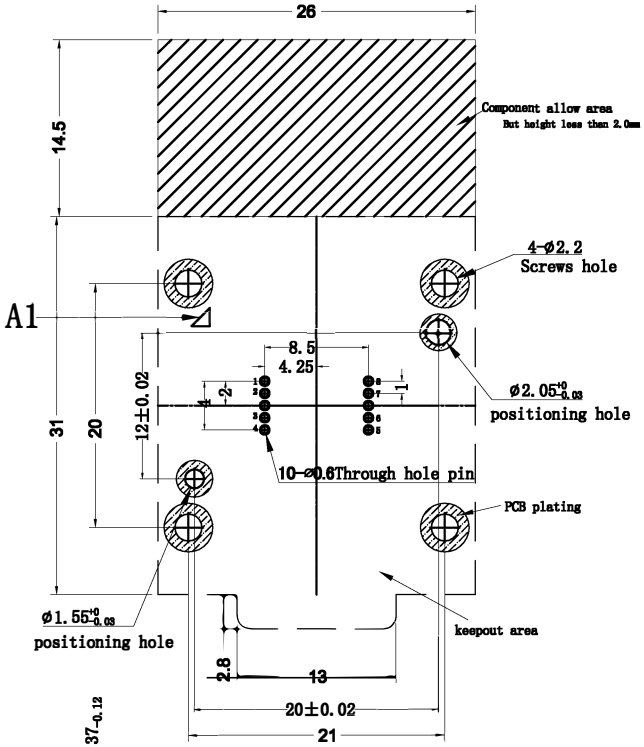

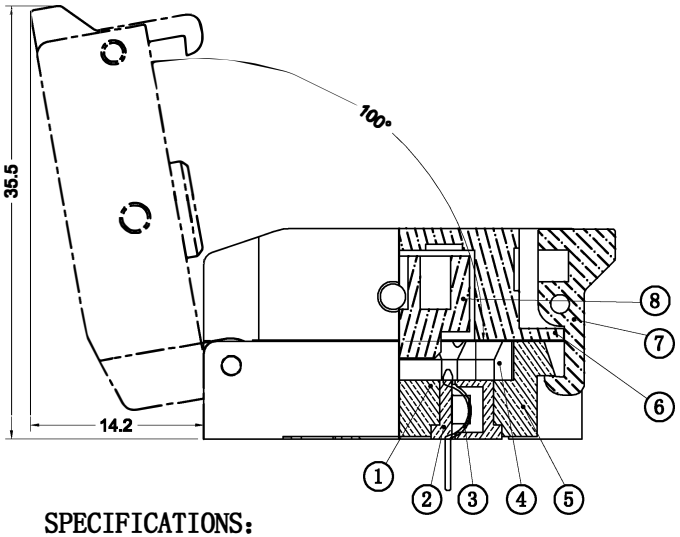

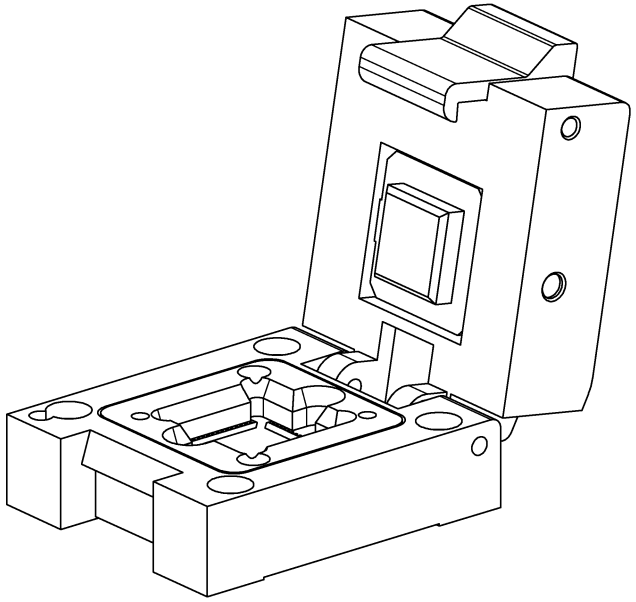

APPLICABLE IC(1:1)

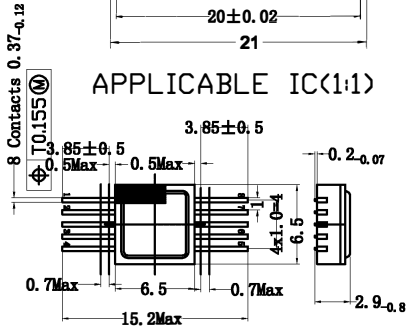

TOP VIEW SIDE VIEW

SPECIFICATIONS:

1 Rating Current: 3A
2 Contact Resistance: ≤100mΩ
3 Insulation impedance: DC500V 1000兆欧以上
4 Voltage withstand: AC700V For 1Min
5 Temperature: -45℃~+155℃
6 LifeSpan: 10000times
7 Operating Pressure: ≤35g/Pin

No	Part	Material	QTY	TIPS
7	Lock buckle	PPS	1	Black
6	TOP Lid	PPS	1	Black
5	pedestal	PPS	1	Black
4	Mid Lid	PPS	1	Black
3	Spring Pin	BeCu	10	Yellow
2	Rubber core	PPS	1	Black
1	IC	/	1	/

PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	P1601 SOCKET
		REV	A	CLASS	SOP10-1.0-0170-TNH(15.2X8.2)
DIMENSION:	mm	SCALE:	1:1	DRW. NO	
APP:		DATE:			
CHECK:		DATE:			
DEGK:	QF	DATE:			

ТЕСТ Компонент